


# UPCOMING ESM CHANGES

REDESIGNED ELECTRONIC SERVICE MANUAL IS COMING SOON.

ISI is excited to announce a whole new look & feel for LubeSoft® ESM (Electronic Service Manual).

- Browser-based technology
- Easy access to data
- Added procedures for servicing oil filters
- Added specifications for diesel exhaust fluid

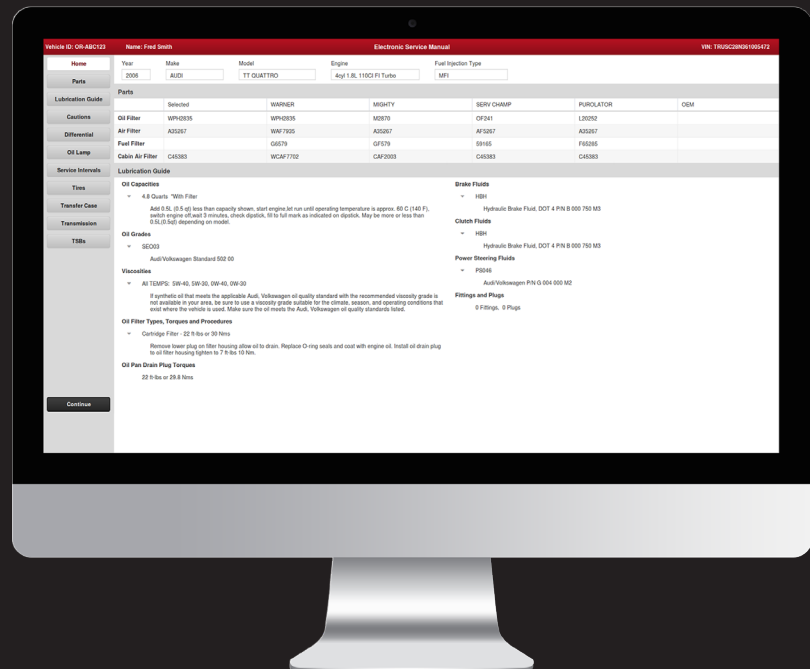

INTS.COM | 800.922.3099

© 2020 INTEGRATED SERVICES, INC.

**ISI**<sup>TM</sup>  
Integrated Services, Inc.

**LubeSoft**<sup>®</sup>  
THE MANAGEMENT MACHINE

Home Year: 2006 Make: AUDI Model: TT QUATTRO Engine: 4cyl 1.8L 110CI FI Turbo Fuel Injection Type: MFI

- Lubrication Guide
- Cautions
- Differential
- Oil Lamp
- Service Intervals
- Tires
- Transfer Case
- Transmission
- TSBs

**Lubrication Guide**

**Oil Capacities**

4.8 Quarts \*With Filter  
 Add 0.5L (0.5 qt) less than capacity shown, start engine, let run until operating temperature is approx. 60 C (140 F), switch engine off, wait 3 minutes, check dipstick, fill to full mark as indicated on dipstick. May be more or less than 0.5L(0.5qt) depending on model.

**Oil Grades**

SEO03  
 Audi/Volkswagen Standard 502 00

**Viscosities**

All TEMPS: 5W-40, 5W-30, 0W-40, 0W-30  
 If synthetic oil that meets the applicable Audi, Volkswagen oil quality standard with the recommended viscosity grade is not available in your area, be sure to use a viscosity grade suitable for the climate, season, and operating conditions that exist where the vehicle is used. Make sure the oil meets the Audi, Volkswagen oil quality standards listed.

**Oil Filter Types, Torques and Procedures**

Cartridge Filter - 22 ft-lbs or 30 Nms  
 Remove lower plug on filter housing allow oil to drain. Replace O-ring seals and coat with engine oil. Install oil drain plug to oil filter housing tighten to 7 ft-lbs 10 Nm.

**Oil Pan Drain Plug Torques**

22 ft-lbs or 29.8 Nms

**Brake Fluids**

HBH  
 Hydraulic Brake Fluid, DOT 4 P/N B 000 750 M3

**Clutch Fluids**

HBH  
 Hydraulic Brake Fluid, DOT 4 P/N B 000 750 M3

**Power Steering Fluids**

PS046  
 Audi/Volkswagen P/N G 004 000 M2

**Fittings and Plugs**

0 Fittings, 0 Plugs

Continue

Home Year: 2006 Make: AUDI Model: TT QUATTRO Engine: 4cyl 1.8L 110CI FI Turbo Fuel Injection Type: MFI

- Lubrication Guide
- Cautions
- Differential
- Oil Lamp
- Service Intervals
- Tires
- Transfer Case
- Transmission
- TSBs

**Oil Lamp**

**Oil Lamp Reset Procedures**

Switch the ignition to off. Press the trip recorder reset button (1) on dash panel while turning on the ignition. When the display shows "SERVICE", release button. Turn the clock adjuster (2) to reset the display. Switch ignition to off. This will set a fixed (15,000 km) for servicing.

